

# CT 302 SD

CASE SEALER

**CYKLOP**<sup>®</sup>  
GLOBAL PACKAGING SOLUTIONS

STRAPPING  
WRAPPING  
CODING  
TAPING

In the packaging industry, tape is often used to seal boxes. Taping is therefore of great importance in the damage free storage and shipping of your products, so they arrive at your customer in perfect condition. Taping machines from Cyklop ensure a reliable and efficient taping process and are easy to set up and operate. The (semi-)automatic taping machines can be operated separately but are also perfectly integrable with other Cyklop machines in your packaging line.


The CT 302 SD is a semi-automatic case sealer suitable for PP tape and often connected at the exit of an automatic carton erector.

The machine is easily adjusted to the required box width. The side belt conveyors are driven by one motor to ensure a simultaneous transport speed and a perfect box sealing.

With the CT 302 SD, it is possible to professionally close thousands of packages per day.

**Options:**

- Tape end / breakage detection
- Caster wheels
- Infeed and outfeed conveyors

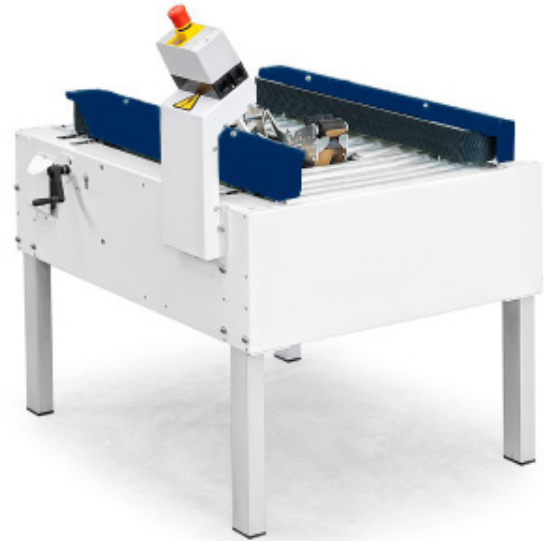

Standard version of the CT 302 SD



CT 302 SD with carton erector CT 3000

Technical data:	CT 302 SD	CT 302 SD
Box length (mm)	150 - ∞	150 - ∞
Box width (mm)	100 - 510	100 - 660
Height (mm)	min. 40	min. 40
Performance	Up to 1400 boxes/h	
Box sealing	Bottom only	
Conveyor height	650 - 750 mm	
Conveyor speed	24 m/min	
Power supply	230V/50Hz/1Ph/0,18kW	
Tape	PP tape	
Tape width	50 mm (optional 75 mm)	
Machine dimensions LxWxH (mm)	990x1037x810	990x1096x810
Machine weight (kg)	120	130