



CT 303 TB

CASE SEALER

CYKLOP[®]
GLOBAL PACKAGING SOLUTIONS

STRAPPING
WRAPPING
CODING
TAPING

In the packaging industry, tape is often used to seal boxes. Taping is therefore of great importance in the damage free storage and shipping of your products, so they arrive at your customer in perfect condition. Taping machines from Cyklop ensure a reliable and efficient taping process and are easy to set up and operate. The (semi-)automatic taping machines can be operated separately but are also perfectly integrable with other Cyklop machines in your packaging line.

The CT 303 TB is a semi-automatic case sealer suitable for PP and PVC tape and perfectly designed for low boxes or high boxes with a small footprint.

After filling the box the operator folds down the upper flaps manually and feeds the box into the case sealer where top and bottom flaps are automatically sealed with tape. The top and bottom drive belts ensure a stable transportation and a perfect box sealing.


The CT 303 SD is easy to adjust to the right height and width and it is possible to close thousands of packages per day professionally.

Options:

- Caster wheels
- Infeed and outfeed conveyors
- Tape end / breakage detection



Standard version of the CT 303 TB

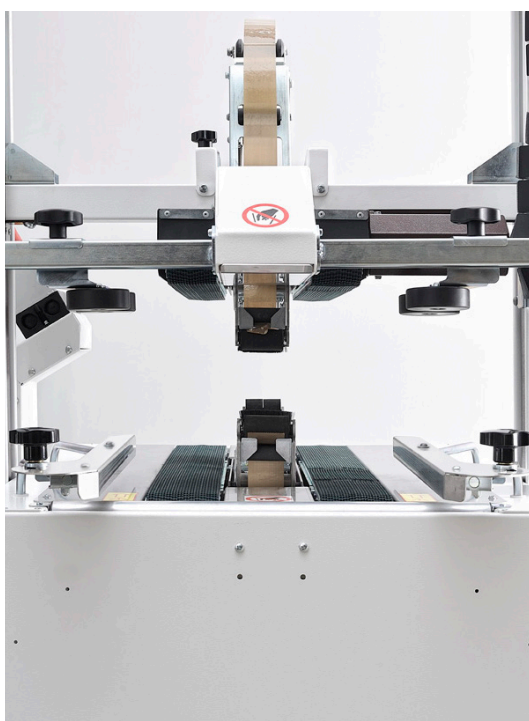

CT 303 TB with conveyors and castor wheels

Technical data:	CT 303 TB	CT 303 TB 65
Box length (mm)	150 - ∞	150 - ∞
Box width (mm)	140 - 510	165 - 660
Height (mm)	100 - 510	110 - 660
Performance (Boxes/h)	up to 1400 boxes/h	
Box sealing	Top and bottom	
Conveyor height	650 - 750 mm	
Conveyor speed	24 m/min	
Power supply	230V/50Hz/1Ph/0,22kW	
Tape	PP or PVC tape	
Tape width	50 mm (optional 75 mm)	
Machine dimensions LxWxH (mm)	990x1464x1022	990x1614x1152
Machine weight (kg)	140	150